



SOFTCOOKER SR WI-FOOD

cottura a bassa temperatura
low temperature cooking



- Apparecchio per la cottura a bassa temperatura con riscaldamento statico dell'acqua.
- Struttura, vasca e coperchio in acciaio inox.
- Pratiche maniglie per il trasporto della vasca.
- Potenti resistenze corazzate a contatto nel fondo della vasca.
- Controllo touch Wi-Food con delta T di 0,2°C.
- Utilizzabile tramite APP gratuita, scaricabile sia per sistema Android che iOs.
- Pratica staffa di posizionamento per la scatola display permette, tramite sistema magnetico, di posizionare i comandi dove risultano più comodi e accessibili.
- 10 programmi memorizzabili sulla macchina e infiniti tramite APP.
- Temperatura selezionabile in °C e °F.
- Pratico rubinetto per lo scarico d'acqua .
- Low temperature cooking device with water static heating.*
- Structure, tank and lid made of stainless steel.*
- Practical handles to carry it easily*
- Powerful armoured contact heating elements in the bottom of the tank.*
- Wi-Food touch control with 0.2°C T delta.*
- Can be used through a free app, downloadable for both the Android and iOS systems.*
- The practical positioning bracket for the display box allows for placing the controls – by means of a magnetic system – in the most comfortable and accessible location.*
- Up to 10 programmes storable on the machine and many more through the APP.*
- Temperature settable in °C and in °F.*
- Practical tap for discharging the water.*



SOFTCOOKER SR 2/3 WI-FOOD




SOFTCOOKER SR 1/1 WI-FOOD

Comandi touch
Touch controlsPratica staffa per display
The practical bracket for the display box

App Store



Google play

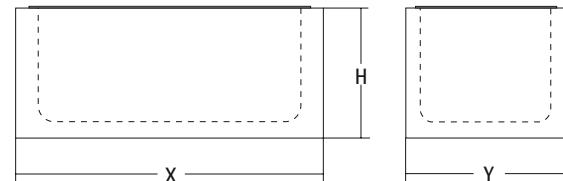

| | watt | °C | lt | lt | mm | mm | mm | kg | mm | kg |
|---------------------------|-------|-----|--------------------------|----|-----|-----|-----|------|-------------|------|
| Softcooker SR 2/3 Wi-Food | 2.000 | 1ph | 24÷99,9 75,2÷199,9 F° | 19 | 390 | 360 | 300 | 5.5 | 600x500x420 | 9.5 |
| Softcooker SR 1/1 Wi-Food | 2.000 | 1ph | 24÷99,9 75,2÷199,9 F° | 29 | 565 | 360 | 300 | 16.5 | 600x500x420 | 20.5 |